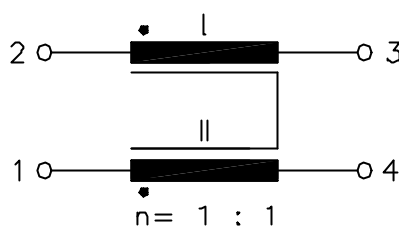
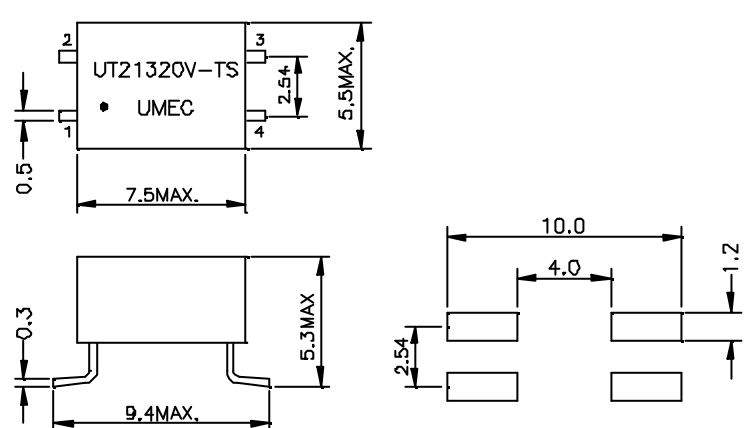


UM PART NO.:	SPECIFICATION	REV.	
UT21320V-TS	2-Fold Common Mode Choke	A0	01/48
Characteristic data: $R_I = R_{II} \leq 2.0 \Omega$ $I_n = 200 \text{mA}$		Schematic diagram: 	
Electrical Specification at 25⁰C: 1.) $L \geq 28 \text{mH}$, at 10KHz 100mV 2.) Polarity and Turns Ratio Tolerance $\pm 2\%$ 3.) $L_S \leq 0.5 \mu\text{H}$, (NII shorted), at 100KHz 1V 4.) HI-pot test: $U_p = 500 \text{V}_{\text{rms}}$, 2s (Winding to Winding)			
Dimension:  <p>NOTE: 1. Packaging information-tape and reel according to item no. "K5SA" of data sheet 01-00 2. Specifications are subject to change without prior notice.</p> <p>UNIT: mm E10-007-B Tolerances: $\pm 0.2 \text{mm}$</p>			