




MODEL NUMBER		INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		CASE
500VDC	3KVDC				NO LOAD	FULL LOAD	
UM201	UM201 K3	5VDC	5 VDC	300mA	110mA	650mA	A
UM203	UM203 K3		12 VDC	125mA	110mA	550mA	
UM205	UM205 K3		15 VDC	100mA	110mA	550mA	
UM207	UM207 K3		± 12 VDC	± 60mA	110mA	550mA	
UM209	UM209 K3		± 15 VDC	± 50mA	110mA	560mA	
UM211	UM211 K3	12VDC	5 VDC	300mA	40mA	270mA	A
UM213	UM213 K3		12 VDC	125mA	40mA	220mA	
UM215	UM215 K3		15 VDC	100mA	40mA	220mA	
UM217	UM217 K3		± 12 VDC	± 60mA	40mA	220mA	
UM219	UM219 K3		± 15 VDC	± 50mA	40mA	220mA	
UM221	UM221 K3	24VDC	5 VDC	300mA	20mA	135mA	A
UM223	UM223 K3		12 VDC	125mA	20mA	115mA	
UM225	UM225 K3		15 VDC	100mA	20mA	115mA	
UM227	UM227 K3		± 12 VDC	± 60mA	25mA	115mA	
UM229	UM229 K3		± 15 VDC	± 50mA	30mA	115mA	
UM231	UM231 K3	28VDC	5 VDC	300mA	20mA	120mA	A
UM233	UM233 K3		12 VDC	125mA	20mA	110mA	
UM235	UM235 K3		15 VDC	100mA	20mA	110mA	
UM237	UM237 K3		± 12 VDC	± 60mA	20mA	110mA	
UM239	UM239 K3		± 15 VDC	± 50mA	25mA	110mA	

CASE A

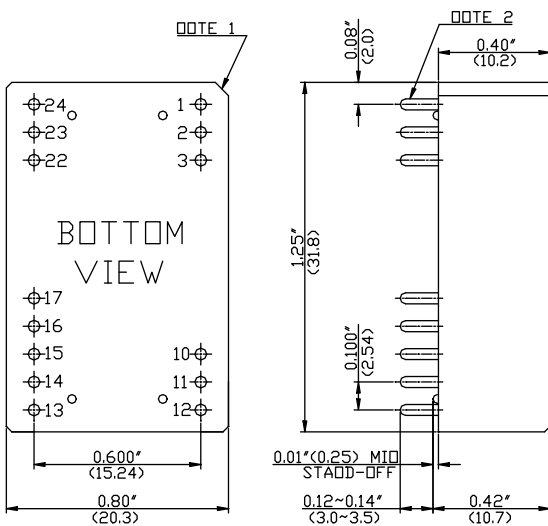

Pin	PIN CONNECTIONS(500V ISO.)		PIN CONNECTIONS(3KV ISO.)	
	Single Output	Dual Output	Single Output	Dual Output
1	+V Input	+V Input	+V Input	+V Input
2	NC*	-V Output	+V Input	+V Input
3	NC*	Common	+V Input	+V Input
10	-V Output	Common	NP*	Common
11	+V Output	+V Output	NP*	Common
12	-V Input	-V Input	-V Output	-TP*
13	-V Input	-V Input	+V Output	-V Output
14	+V Output	+V Output	NP*	NP*
15	-V Output	Common	NP*	+V Output
16	NP*	NP*	NP*	+TP*
17	NP*	NP*	TP*	NP*
22	NC*	Common	-V Input	-V Input
23	NC*	-V Output	-V Input	-V Input
24	+V Input	+V Input	-V Input	-V Input

\*NC(No Connection)

\*NP(No Pin)

\*TP(Test Point)

All dimensions in inches(mm).

Note 1:Cut-corner marking for Pin No.1

Note 2:Pin size is 0.020± 0.005 inch(0.5mm) dia.  
or 0.020\*0.012 inch

Note 3:Tolerance .xx =± 0.02

.xxx =± 0.010